


GETTING STARTED

Motion Sensor

The Motion Sensor is perfect for monitoring large, open spaces in your home. It's also easy to set up:

- 1 Select a spot in a large, high-traffic area of your home, approximately 7 1/2 feet off the ground.
- 2 If you're adhering your Motion Sensor to a wall using the two included adhesives, make sure the surface is clean and dry. You can also set your Motion Sensor directly on a shelf.
- 3 Once you've attached the included adhesives and removed the wax backing, press the sensor against the wall for 30 seconds.
- 4 You'll want to ensure you've placed your Motion Sensor correctly. To do so, you must put your sensor in test mode. See next page.

(a) Corner Placement or (b) Wall Placement

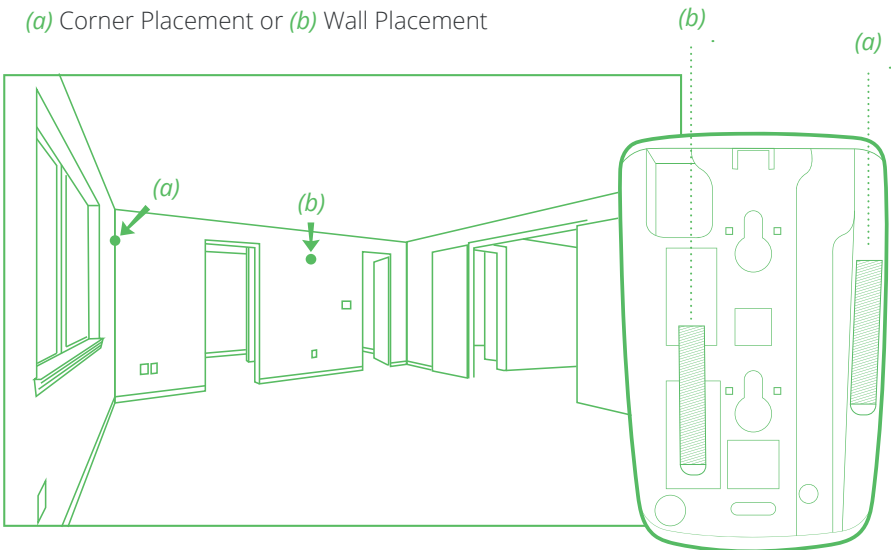

Regardless of whether you are placing sensors in a corner or on a wall, be sure to use both adhesive strips.

NEED HELP? WWW.FRONTPOINT.COM/HELP


GETTING STARTED

Motion Sensor

Activating Test Mode

Note: Make sure system is disarmed.

- 1 To activate test mode, press up on the grooved button on the bottom of the sensor to remove the front portion, then replace. The red light will turn on for a few seconds.
- 2 Leave the sensor area and wait for the red light to turn off.
- 3 Walk across the coverage area to test. If the light illuminates, the sensor is working properly.
- 4 The motion sensor performs a re-calibration after each time it senses motion.
- 5 The re-calibration takes about 30 seconds.
- 6 The sensor will NOT sense motion during the re-calibration.
- 7 The sensor will stay in test mode for 3 minutes.

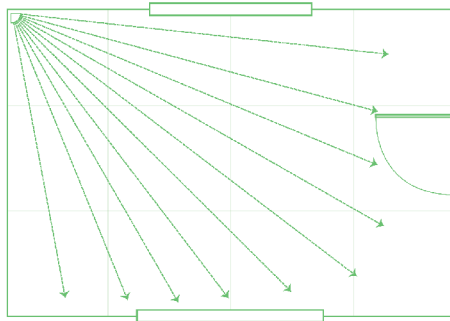


The Motion Sensor has a detection range of 90 degrees, and detects motion up to 40 feet away

DETECTION AREA

Getting To Know Your Motion Sensor

To get the most out of your equipment, you should have a good understanding of how it works. Take a look at some useful illustrations that will help you get to know your Motion Sensor.

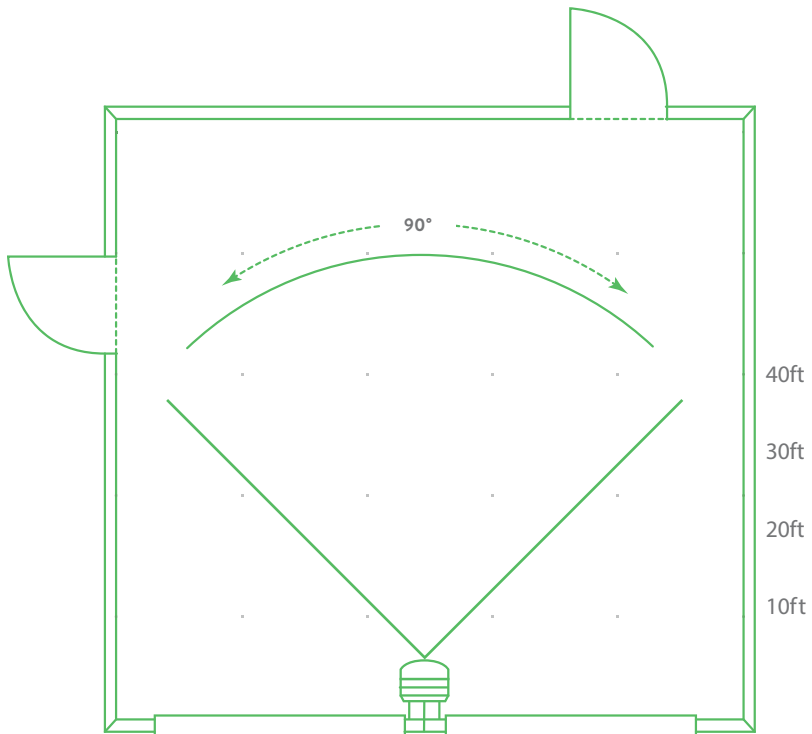


Your Motion Sensor is an infrared sensor that covers 90 degrees, with a range of about 40 feet. The sensor best detects motion when a person is moving across its field of vision, rather than directly toward it.

STANDARD PLACEMENT

Getting To Know Your Motion Sensor

Placing the Motion Sensor as instructed will provide the most thorough coverage. However, this method is not recommended for owners of large pets. See below for pet owner placement tips.

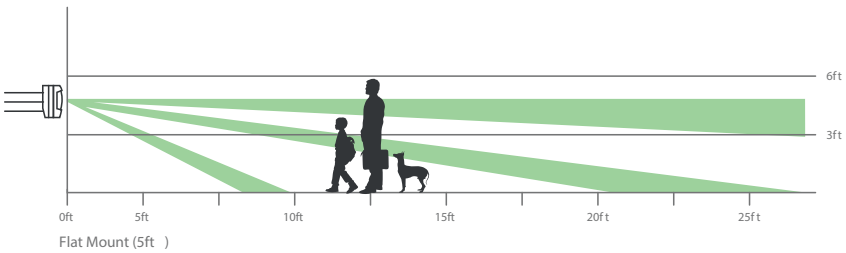

Tips For Pet Owners – Motion Sensors are designed to avoid detecting pets weighing less than 40 pounds. However, there are situations in which even smaller pets can trigger the sensors. If you find that your pet is triggering the sensor and causing false alarms, take the following tips into consideration:

- 1 Pet immunity is best when the motion sensor is mounted at 7.5 to 9.5 feet high and aimed away from house features that could allow pets to be high in the detection field (e.g. stairs, counter tops, tall furniture).
- 2 If you're still experiencing false activations, you may need to relocate the sensor so that it is not facing an surface that your pet has the ability to climb onto.